

Collezioni Resin



Collezione RESIN

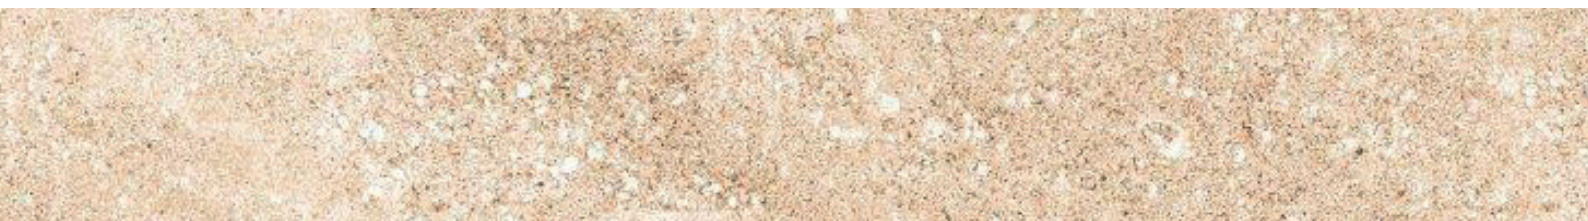

Resin - 30x30 - 40x40 - 60x60 - 80x80 - 120x120

GRES PORCELLANATO RETTIFICATO



serie Resin



Resin Tortora 120x120

GRES PORCELLANATO RETTIFICATO



serie Resin



serie Resin




Resin Grigio 60x60



serie Resin



5150 30x30 Resin Bianco
5154 40x40 Resin Bianco



5151 30x30 Resin Grigio
5155 40x40 Resin Grigio



5152 30x30 Resin Beige
5156 40x40 Resin Beige



5153 30x30 Resin Tortora
5157 40x40 Resin Tortora



5158 60x60 Resin Bianco
5162 80x80 Resin Bianco
5166 120x120 Resin Bianco



5160 60x60 Resin Grigio
5164 80x80 Resin Grigio
5168 120x120 Resin Grigio



5159 60x60 Resin Beige
5163 80x80 Resin Beige
5167 120x120 Resin Beige



5161 60x60 Resin Tortora
5165 80x80 Resin Tortora
5169 120x120 Resin Tortora

** Non Rettificato Assorbimento Acqua 4%

* Disponibilità su richiesta con ordine minimo di 5 container

DATI TECNICI technical data	FORMATO size		PCS/BOX	M/BOX	KG/BOX	BOX/PLT	M/PLT	KG/PLT	PAL/Cntr
Gres porcellanato dig.	* 30x30 **	9 mm	10	0,90	15,50	80	72,00	1240	22,5/m 1620,00
Gres porcellanato dig.	* 40x40	10 mm	6	0,96	20,00	64	61,44	1285	21,75/m 1336,00
Gres porcellanato dig.	60x60	9 mm	4	1,44	29	36	51,84	1044	27/m 1399,68
Gres porcellanato dig.	* 80x80	9 mm	3	1,92	66	32	61,44	1330	20/m 1228,80
Gres porcellanato dig.	* 120x120	9 mm	2	2,88	16	23	66,24	1550	17/m 1126,08
Battiscopa	7,5x60	9 mm	20	12ml		56	672ml	900	35/ml 23520

GRES PORCELLANATO RETTIFICATO



serie Resin



Resin Beige 80x80 -



THREE DIFFERENT FACES



STARTING SIZE




120x120



80x80




60x60




40x40



30x30



APPLICATION




TOPS & KITCHEN




CURVED SURFACE




INTERIOR & DESIGN



FLOORS WALLS & STAIRS




DOORS & SLIDING WALLS



TOPS & BATHROOMS



SHELVES & CONSOLE

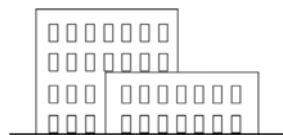

VENTILATED FACADE

TECHNICAL SPECIFICATION FOR GRES PORCELLANATO

CHARACTERISTICS	FLOOR TILES		METHOD OF TESTING
	INTERNATIONAL STD. ISO 13006 Bla/en 14411	RB S.r.l.	
Deviation in Length	+/- 0.6%	+/- 0.3%	ISO 10545 Pt 2
Deviation in Thickness	+/- 5%	+/- 3%	ISO 10545 Pt 2
Straightness of Sides	+/- 0.5%	+/- 0.1%	ISO 10545 Pt 2
Rectangularity	+/- 0.6%	+/- 0.2%	ISO 10545 Pt 2
Surface Flatness	+/- 0.5%	+/- 0.2%	ISO 10545 Pt 2
Water Absorption	< 0.5%	< 0.05%	ISO 10545 Pt 3
Mohs Hardness	> 6	>6	EN 101
Flexural Strength	> 35N/mm ²	> 46N/mm ²	ISO 10545 Pt 4
Skid Resistance (Friction coefficient)	-	> 0.4	ISO 10545 Pt 17
Breaking Strength	1300 N	2800 N	ISO 10545 Pt 4
Frost Resistance	Frost Proof	Frost Proof	ISO 10545 Pt 12
Chemical Resistance	No Damage	No Damage	ISO 10545 Pt 13
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 Pt 9
Colour Resistance	No Damage	No Damage	DIN 51094
Stain Resistance	Resistance	Resistance	ISO 10545-14
Moisture Expansion	Nil	Nil	ISO 10545-10
Glossiness	-	Min. 80% Reflection	Glossmeter
Resistance to Surface Abrasion (of tiles intended for use on floors)	Abrasion Class Shall be Specified by the Manufacturer	PEI Class 3-5	ISO-10545-7 IS:13630-11

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Sakarmarbo floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.



www.rbceramiche.com

RB S.r.l.

41053 Maranello (MO) Italy - Via Vignola, 11

info@rbceramiche.com export@rbceramiche.com